



C SERIES

5.2x5.2 With Ground Terminal Tact Switch

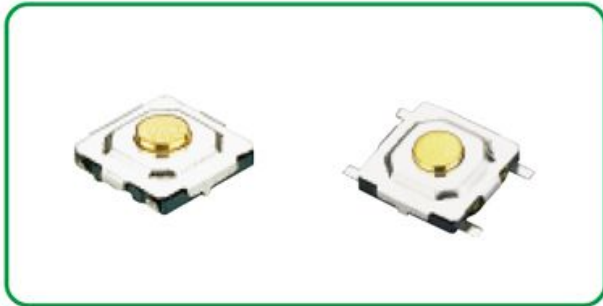

HOW TO ORDER

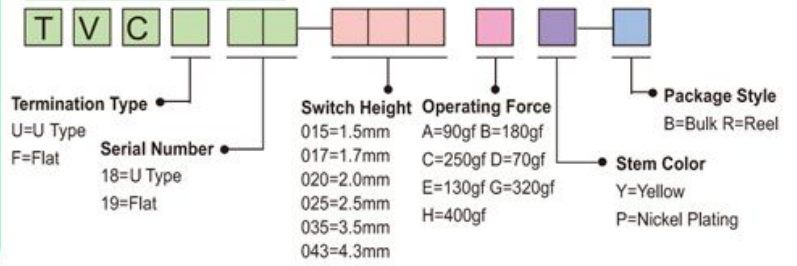

Features

- 5.2x5.2mm dimensions suitable for high density mounting.
- Available with ground terminal for electrostatic discharge
- Contact sealed construction offers a highly reliable switch.
- Reflow solderable.
- Packaged with a 12mm wide embossed taping.

Applications

- For operating various electronic devices such as audio devices, video recorders, communication devices, cameras, automotive sets, electric home appliances, etc.

Specification

Items		Standard
Operating temperature range		-30°C to +85°C
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩmin. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩmax.
Durability	Lifetime	A:B:D:E:200,000 Cycles C:G:H:100,000 Cycles
Mechanical performance	Operating force	A:90gf B:180gf C:250gf D:70gf E:130gf G:320gf H:400gf
	Travel	0.25 ± 0.1mm

Diagram

No.	Dimensions	Circuit Diagram Pad Layout
1	<p>• TVCU18</p>	
2	<p>• TVCF19</p>	