


E SERIES

6.2x6.2 SMT Terminals Type Tact Switch

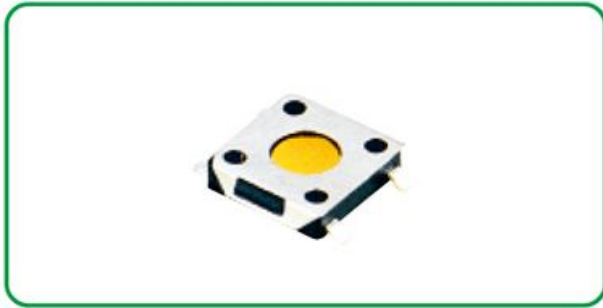

HOW TO ORDER

T V E M 0 6

Terminal Distance
 A=8.0mm
 B=9.0mm
 C=10.0mm

Operating Force
 B=180gf
 C=250gf
 E=130gf

Package Style
 B=Bulk
 R=Reel

Features

- Reflow solderable.
- Available with anti-ESD ground terminal.
- Packaged with a 16mm wide embossed taping.

Applications

- Operating switches in all types of electronic equipment such as audio devices, office devices, communication devices, measuring instruments, TVs, video recorders, automotive sets, etc.

Specification

Items		Standard
Operating temperature range		-30 °C to +85 °C
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MW min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mW max.
Durability	Lifetime	B:200,000 Cycles C:100,000 Cycles
Mechanical performance	Operating force	B:180gf C:250gf
	Travel	0.25 ± 0.1mm

Diagram

No.	Dimensions	Circuit Diagram
		Pad Layout
1	<ul style="list-style-type: none"> • TVEM06 	