


# B SERIES

## 4.0x6.1 Horizontal Push Tact Switch



### HOW TO ORDER

**T H B M 0 5**

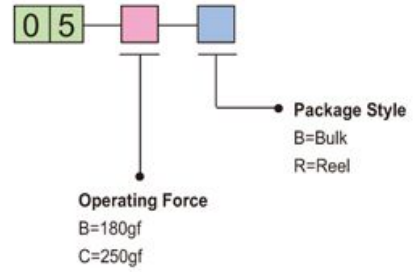

### Features

- Horizontal type capable of horizontally operating to the PC board.
- Reflow solderable.
- Packaged with a 16mm wide embossed taping.

### Applications

- For operating various electronic devices such as audio devices, video recorders, communication devices, cameras, home appliances etc.

### Specification

Items		Standard
Operating temperature range		-30°C to +85°C
Electrical performance	Rating	50mA, 12V DC
	Insulation resistance	100MW min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mW max.
Durability	Lifetime	50,000 Cycles min.
Mechanical performance	Operating force	B:180gf C:250gf
	Travel	0.30 ± 0.1mm

### Diagram

No.	Dimensions	Circuit Diagram
		Pad Layout
1	<ul style="list-style-type: none"> <li>• THBM05</li> </ul>	