


J SERIES

7.0x7.0 Sealed Tact Switch



HOW TO ORDER

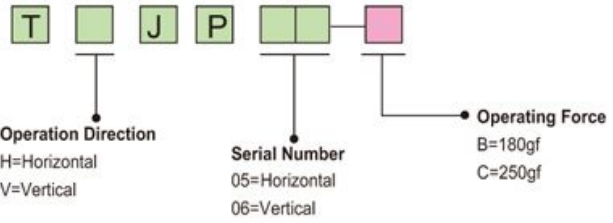

Features

- Snap-in type, which can be directly mounted onto a PC board.
- Part of output terminals can be used as jumper leads, thus making circuit design easy.

Applications

- For operating various electronic devices such as washing machines requiring water proof construction

Specification

Items		Standard
Operating temperature range		-40 °C to +90 °C
Electrical performance	Rating	50mA, 12V DC
	Insulation resistance	100MW min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	500mW max.
Durability	Lifetime	100,000 Cycles Min
Mechanical performance	Operating force	B:180gf C:250gf
	Travel	0.25 ± 0.1mm

Diagram

No.	Dimensions	Circuit Diagram
		Pad Layout
1	<ul style="list-style-type: none"> • THJP05 	
2	<ul style="list-style-type: none"> • TVJP06 	