


B SERIES

3.5x6.0 SMT Type Tact Switch



HOW TO ORDER

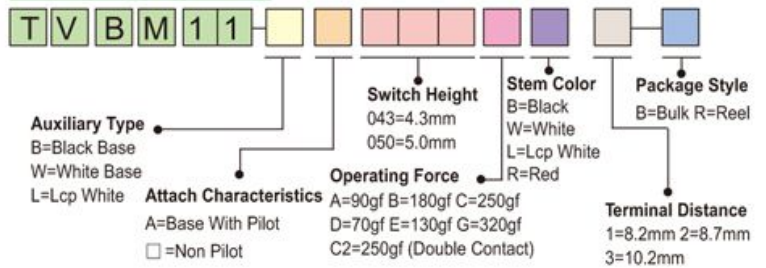

Features

- Reflow solderable
- Sharp “click” feel with a positive tactile feedback

Applications

- Operating switches in all types of electronic equipment such as audio apparatus, office equipment, communication apparatus, measuring instruments, TV sets, VCRs, etc

Specification

Items		Standard
Operating temperature range		-20℃ to +70℃
Electrical performance	Rating	50mA, 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	A:D:E:B:50,000Cycles C:G:30,000 Cycles C2:100,000 Cycles
Mechanical performance	Operating force	A:90gf B:180gf C:250gf D:70gf E:130gf G:320gf
	Travel	0.25 ± 0.1mm

Diagram

No.	Dimensions	Circuit Diagram									
		Pad Layout									
1	<p>● TVBM11</p> <table border="1"> <tr> <td>H</td> <td>A</td> </tr> <tr> <td>4.3</td> <td>8.2</td> </tr> <tr> <td>5.0</td> <td>8.7</td> </tr> <tr> <td></td> <td>10.2</td> </tr> </table>	H	A	4.3	8.2	5.0	8.7		10.2		
H	A										
4.3	8.2										
5.0	8.7										
	10.2										