



# I SERIES

## 6.0x6.0 Led Built-in Type

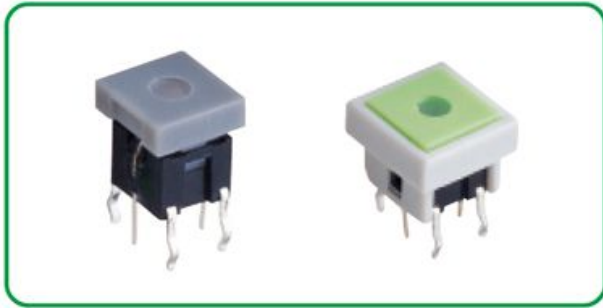

### HOW TO ORDER

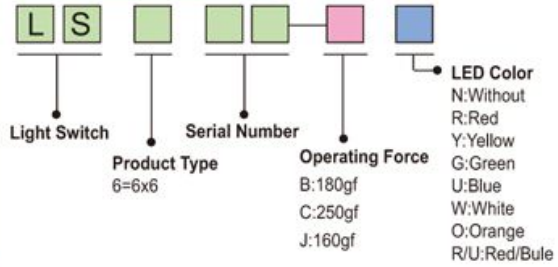

### Features

- Snap-in type, which can be directly mounted on PC board.
- Some of output terminals can be also used as jumper leads, thus making circuit design easy.
- Standard knobs are available.

### Applications

- Operating switches in all types of electronic equipment such as audio apparatus, office equipment, communications apparatus, measuring instruments, TV sets, VCRs, etc

### Specification

Items		Standard
Operating temperature range		-25°C to +85°C
Electrical performance	Rating	100mA. 30V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	100,000 Cycles Min
Mechanical performance	Operating force	J:160gf B:180gf C:250gf
	Travel	0.25 ± 0.1mm

### Diagram

No.	Dimensions	Circuit Diagram
		Pad Layout
1	<p>• LS603</p>	
2	<p>• LS604</p>	