


# D SERIES

## 6.0x6.0 Radial Taping Type Tact Switch



### HOW TO ORDER

**T H D T 1 9**

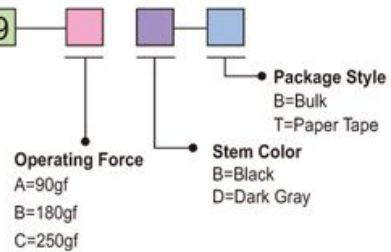

### Features

- Supplied with radial taping.
- Round terminals are most suitable for radial auto-insertion/ mounting on the PC board.

### Applications

- Operation of TVs and display monitors
- Operation of video recorders, various audio devices, communication devices and automotive sets
- For operating various electroic devices

### Specification

Items		Standard
Operating temperature range		-30°C to +85°C
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	A:500,000 Cycles B:300,000 Cycles C:100,000 Cycles
Mechanical performance	Operating force	A:90gf B:180gf C:250gf
	Travel	0.25 ± 0.1mm

### Diagram

No.	Dimensions	Circuit Diagram
		Pad Layout
1	<ul style="list-style-type: none"> <li>• THDT19</li> </ul>	

TACT SWITCH