


E SERIES

6.2x6.2 Dust-Proof Type Tact Switch



HOW TO ORDER

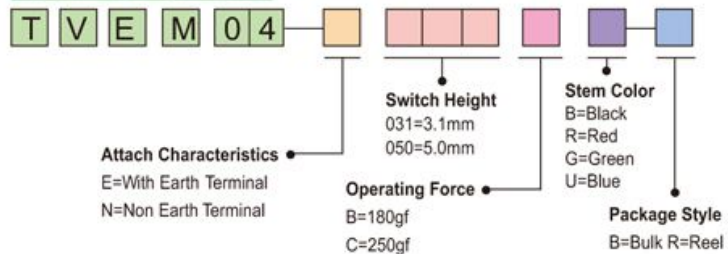

Features

- Reflow solderable.
- Contacts are completely sealed, enhancing reliability
- Packaged with a 16mm wide embossed taping.

Applications

- Operating switches in all types of electronic equipment such as audio devices, office devices, communication devices, measuring instruments, TVs, video recorders, automotive sets, etc.

Specification

Items		Standard
Operating temperature range		-30°C to +85°C
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MW min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mW max.
Durability	Lifetime	B:500,000 Cycles C:300,000 Cycles
Mechanical performance	Operating force	B:180gf C:250gf
	Travel	0.25 ± 0.1mm

TACT SWITCH

Diagram

No.	Dimensions	Circuit Diagram	
		Pad Layout	
1	<ul style="list-style-type: none"> ● TVEM04 		