


# A SERIES


## 2.3x4.6 Miniature Type Tact Switch



TACT SWITCH

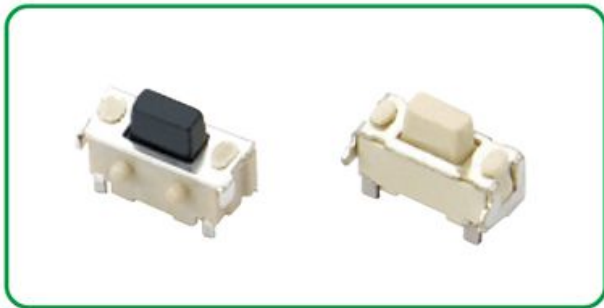

### HOW TO ORDER

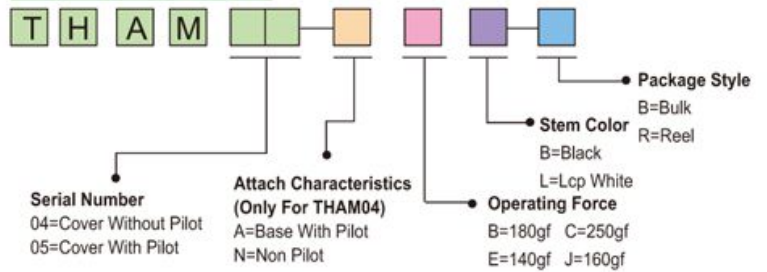

### Features

- Improve mounting density of components on PC board.
- Reflow solderable
- Contacts are completely sealed, enhancing reliability
- Packaged with a 12mm wide embossed taping.

### Applications

- For operating various mobile devices
- For operating various devices that require high density mounting such as mobile phones, communication devices, compact electronic devices

### Specification

Items		Standard
Operating temperature range		-30℃ to +85℃
Electrical performance	Rating	50mA, 12V DC
	Insulation resistance	100MW min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mW max.
Durability	Lifetime	A:B:E:50,000 Cycles min. C:30,000 Cycles
Mechanical performance	Operating force	A:90gf B:180gf C:250gf E:140gf
	Travel	0.15 ± 0.05mm

### Diagram

No.	Dimensions	Circuit Diagram Pad Layout
1	<ul style="list-style-type: none"> <li>• THAM04</li> </ul>	
2	<ul style="list-style-type: none"> <li>• THAM05</li> </ul>	