


A SERIES

2.6x6.1 Miniature Type Horizontal Push Tact Switch



HOW TO ORDER

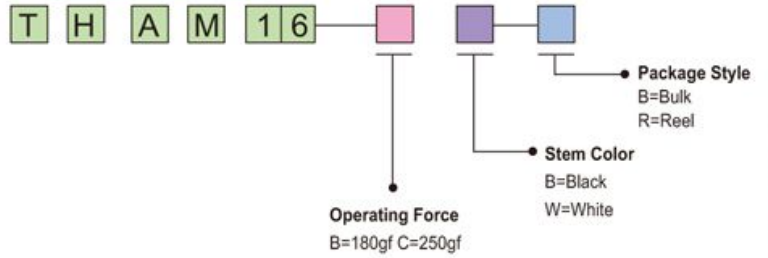

Features

- Compact, low-profile surface-mounting type keyboard switches ideal for high-density mounting
- Contacts are completely sealed, enhancing reliability
- Reflow solderable
- Sharp "click" feel with a positive tactile feedback

Applications

- Operating switches in all types of electronic equipment such as audio apparatus, office equipment, communication apparatus, measuring instruments, TV sets, VCRs, etc

Specification

| Items | | Standard |
|-----------------------------|-----------------------|---------------------|
| Operating temperature range | | -30°C to +85°C |
| Electrical performance | Rating | 50mA, 12V DC |
| | Insulation resistance | 100MW min. 100V DC |
| | Dielectric strength | 250V AC for 1 min. |
| | Contact resistance | 100mW max. |
| Durability | Lifetime | 100,000 Cycles min. |
| Mechanical performance | Operating force | B:180gf C:250gf |
| | Travel | 0.25 ± 0.1mm |

Diagram

| No. | Dimensions | Circuit Diagram |
|-----|--|-----------------|
| | | Pad Layout |
| 1 | <ul style="list-style-type: none"> ● THAM16 | |

TACT SWITCH