


TOOL LIST	
P1 & P2 INNER MOLD	LM-009
P1 & P2 OUTER MOLD	LM-057



NO.	REVISION RECORD	REV.
1	FIRST ISSUE.	A
2	CHANGE CABLE SPEC.	B

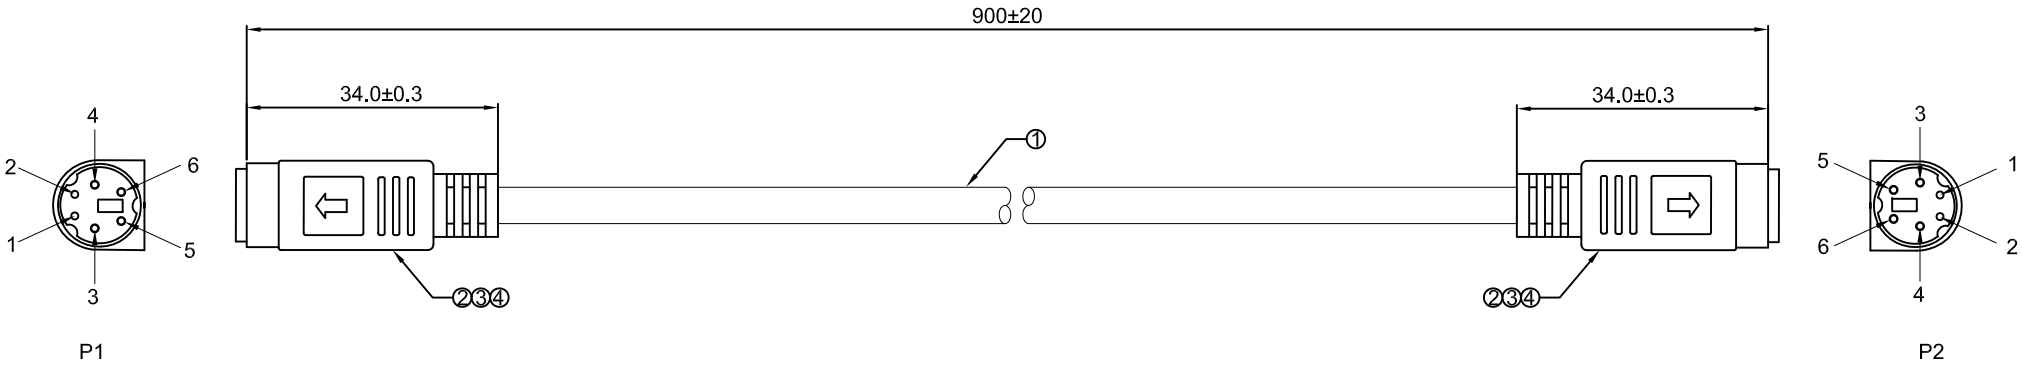

PIN OUT

P1	P2
1	1 (BLACK)
2	2 (BROWN)
3	3 (RED)
4	4 (ORANGE)
5	5 (PURPLE)
6	6 (GREEN)
SHELL	SHELL(DRAIN)

- NOTES:
- ALL MATERIALS ARE ROHS COMPLIANT.
  - TESTING: ALL PRODUCTS MUST BE 100% TESTED AT:  
COND.: 5 OHM  
INS.: 10M OHM  
HI-V.: DC 300V 0.01 SEC.
  - 1.5OHMS MAX IN EACH PIN.
  - PACKING: EACH CABLE IN A CLEAR ZIP-LOCK POLY-BAG.

NO.	DESCRIPTION	Q'TY	UNIT	PART NO.	UNIT: MM	DATE: 2021-01-28	CUSTOMER:	ROMTRONIC Cables to Run	东 莞 市 汉 都 电 子 有 限 公 司 Dongguan Hundu Electronic Co., Limited	ITEM :	DRAWING NO.:	REV.:	SHEET:
4	OVER MOLD: 50P BLACK PVC.	0.016	KG				CUSTOMER SIGNED:			MINI DIN 6PIN F TO F, L=900MM	HD20200905-01	B	1/1
3	INNER MOLD: PE LOW DENSITY.	0.008	KG				TOLERANCE:						
2	CONNECTOR: MINI DIN 6PIN FEMALE, SOLDER TYPE G/F CONTACTS, BLACK INSULATION, SHELL NICKEL PLATED.	2	PC				.X +/-	APPROVED: JEFF GAO					
1	CABLE: UL2464 CABLE, 28AWG(7/0.12TC)*6C+DRAIN(7/0.12TC)+AL-FOIL , BLACK PVC JACKET. OD: 4.0±0.15MM.	900	MM				.XX +/-	CONFIRMED: WANG JUN					
							.XXX +/-	CHECKED: YUAN TAO					
								DRAWN: PETER HU					