


I SERIES

12.0x12.0 With Light Tact Switch



HOW TO ORDER

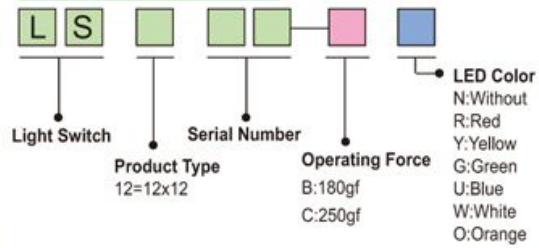

Features

- High Brilliance Lighted Switch
- High Reliability
- Variety of colors
- Fully back-lit for high brilliance

Applications

- Control panels
- Variety of applications

Specification

Items		Standard
Operating temperature range		-10°C to +60°C
Electrical performance	Rating	50mA, 12V DC
	Insulation resistance	100MW min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mW max.
Durability	Lifetime	100,000 Cycles min
Mechanical performance	Operating force	B:180gf C:250gf
	Travel	0.30 ± 0.1mm

LED Data

Peak Perverse Voltage	See ordering guide
Max.Forward Current	20mA

Color	IF Forward Direct Current (mA)
Yellow	25
Red	25
Green	25

VF Forward Voltage (v) TYP.	NN Peak Emission Wavelength(nm)
4.2	630
4.2	565
4.2	589

Diagram

No.	Dimensions	Circuit Diagram
		Pad Layout
1	<ul style="list-style-type: none"> ● LS1201 	