


D SERIES

6.2x6.2 Long-Life Type Tact Switch



HOW TO ORDER

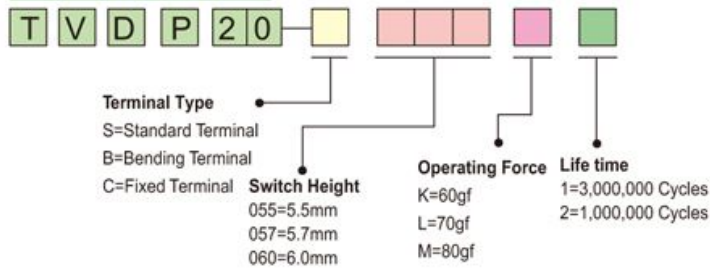

Features

- Snap-in type, which can be directly mounted on PC board.
- Sharp "click" feel with a positive tactile feedback
- 3 million times life cycles maximum

Applications

- Widely used in computer peripherals (mouse, printer, etc.)

Specification

Items		Standard
Operating temperature range		-25°C to +75°C
Electrical performance	Rating	50mA, 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	1,000,000 Cycles min
Mechanical performance	Operating force	K:60gf L:70gf M:80gf
	Travel	0.30 ± 0.1mm

Diagram

No.	Dimensions	Circuit Diagram				
		Pad Layout				
1	<ul style="list-style-type: none"> • TVDP20 <table border="1" style="float: right;"> <tr><td>H</td></tr> <tr><td>5.5</td></tr> <tr><td>5.7</td></tr> <tr><td>6.0</td></tr> </table>	H	5.5	5.7	6.0	
H						
5.5						
5.7						
6.0						