H SERIES

Lever and Push Operation Type Switch Tact Switch

Features

- The control unit provides both momentary operation by lever and center push operation.
- Using a single knob enables compound actions with simple operations.
- Reflow solderable.

Applications

- For the operation of telecommunication equipment such as mobile phones, etc.
- Compact, portable units such as camcoders, portable audios, car radios, etc.

Specification

Items		Standard
Operating temperature range		-30℃ to +85℃
Electrical performance	Rating	10mA. 5V DC
	Output voltage	1V max. at 1mA 5V DC
	Contact resistance	100mΩmax.
	Lifetime	100,000 Cycles
Durability	Operating force	Lever portion 70±40gf Push portion 250±100gf
Mechanical performance	Travel	4-direction -20° −0° − +20°
		Push portion 0.70 ± 0.1mm

Diagram

No.	Dimensions	Circuit Diagram / Pad Layout
1	● TMHU32 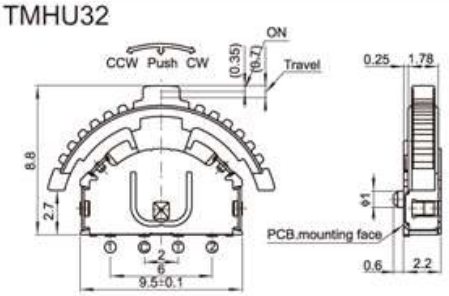	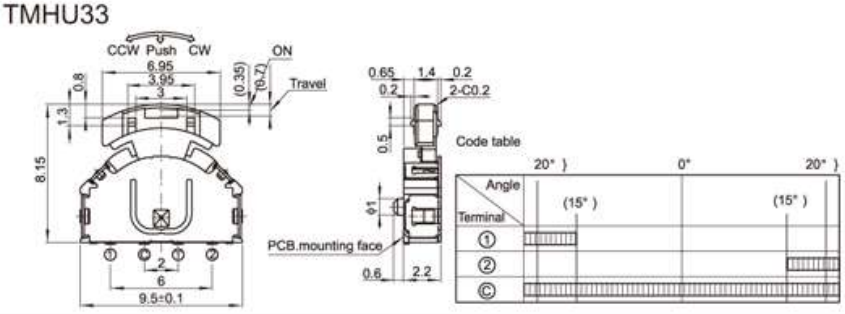
2	● TMHU33