


# E SERIES

## 6.2x6.2 With Middle-travel (SMT)Type Tact Switch



### HOW TO ORDER

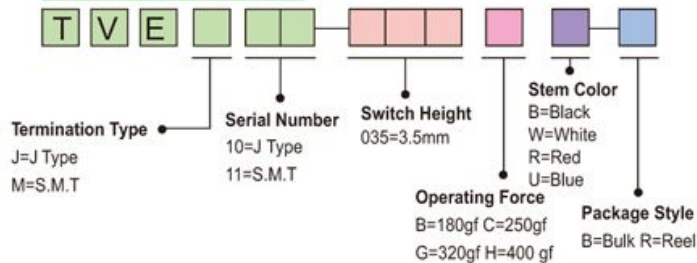

### Features

- Rubber Stem achieves excellent operability with pre-travel and over-travel.
- Reflow solderable.
- Packaged with a 16mm wide embossed taping.

### Applications

- Electric home appliances
- Car navigation systems, car audio systems
- Operating switches in all types of electronic equipment such as audio devices, office devices, communication devices, measuring instruments, TVs, video recorders, automotive sets, etc.

### Specification

Items		Standard
Operating temperature range		-30°C to +85°C
Electrical performance	Rating	50mA, 12V DC
	Insulation resistance	100MW min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mW max.
Durability	Lifetime	B:C:200,000 Cycles G:H:100,000 Cycles
Mechanical performance	Operating force	B:180gf C:250gf G:320gf H:400gf
	Travel	0.35 ± 0.1mm

### Diagram

No.	Dimensions	Circuit Diagram Pad Layout
1	<p>• TVEJ10</p>	
2	<p>• TVEM11</p>	