


J SERIES

8.0x8.0 Sealed Tact Switch



HOW TO ORDER

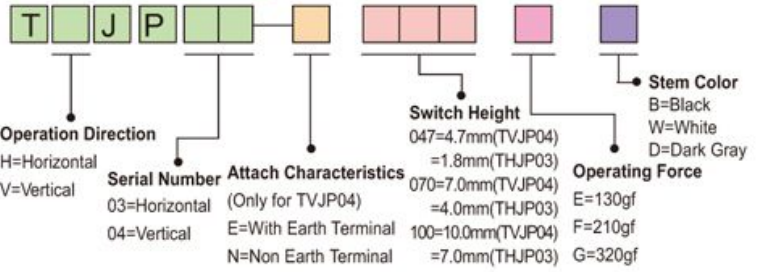

Features

- Snap-in type, which can be directly mounted onto a PC board.
- Part of output terminals can be used as jumper leads, thus making circuit design easy.

Applications

- For operating various electronic devices such as washing machines requiring water proof construction

Specification

Items		Standard
Operating temperature range		-40 °C to +90 °C
Electrical performance	Rating	50mA, 12V DC
	Insulation resistance	100MW min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	500mW max.
Durability	Lifetime	100,000 Cycles Min
Mechanical performance	Operating force	E:130gf F:210gf G:320gf
	Travel	0.25 ± 0.1mm

Diagram

No.	Dimensions	Circuit Diagram Pad Layout					
1	<p>• THJP03</p> <table border="1"> <tr><th>L</th></tr> <tr><td>1.8</td></tr> <tr><td>2.2</td></tr> <tr><td>4.0</td></tr> <tr><td>7.0</td></tr> </table>	L	1.8	2.2	4.0	7.0	
L							
1.8							
2.2							
4.0							
7.0							
2	<p>• TVJP04</p> <table border="1"> <tr><th>H</th></tr> <tr><td>4.7</td></tr> <tr><td>5.2</td></tr> <tr><td>7.0</td></tr> <tr><td>10.0</td></tr> </table>	H	4.7	5.2	7.0	10.0	
H							
4.7							
5.2							
7.0							
10.0							