


TOOL LIST	
P1 & P2 INNER MOLD	LM-009
P1 & P2 OUTER MOLD	LM-057




NO.	REVISION RECORD	REV.
1	FIRST ISSUE.	A

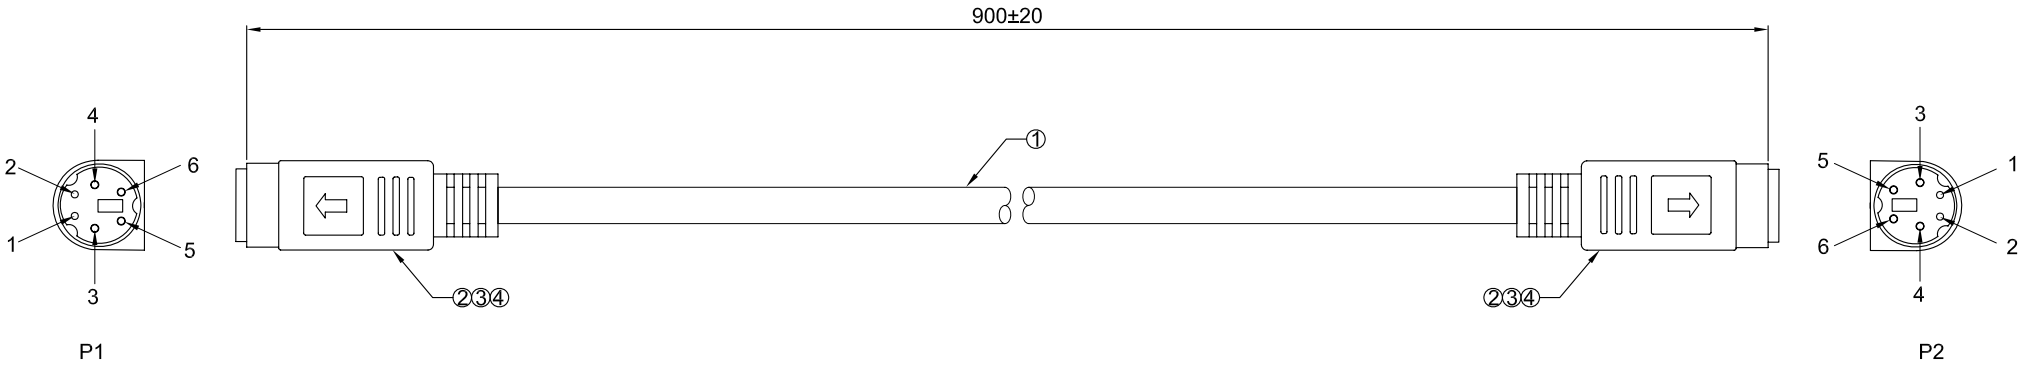

- NOTES:
1. ALL MATERIALS ARE ROHS COMPLIANT.
  2. TESTING: ALL PRODUCTS MUST BE 100% TESTED AT:  
COND.: 1.5 OHM MAX  
INS.: 10M OHM  
HI-V.: DC 300V 0.01 SEC.
  3. PACKING: EACH CABLE IN A CLEAR ZIP-LOCK POLY-BAG.

PIN OUT

P1	P2
1	1 (BLACK)
2	2 (BROWN)
3	3 (RED)
4	4 (ORANGE)
5	5 (YELLOW)
6	6 (GREEN)
SHELL	SHELL(DRAIN)

				CUSTOMER:		 <b>东莞市汉都电子有限公司</b> Dongguan Hundu Electronic Co., Limited		
				PART NO.:				
				CUSTOMER SIGNED:				
4	OVER MOLD: 50P BLACK PVC.	0.016	KG	TOLERANCE:	APPROVED: JEFF GAO	ITEM : MINI DIN 6PIN F TO F, L=900MM		
3	INNER MOLD: PE LOW DENSITY.	0.008	KG		.X +/-			
2	CONNECTOR: MINI DIN 6PIN FEMALE, SOLDER TYPE, G/F CONTACTS, BLACK INSULATION, SHELL NICKEL PLATED.	2	PC	.XX +/-	CHECKED: YUAN TAO	DRAWING NO.:	REV.:	SHEET:
1	CABLE: UL2464 CABLE, 28AWG(7/0.12TC)*6C+DRAIN+AL-FOIL , BLACK PVC JACKET, OD: 5.0±0.15MM.	900	MM	.XXX +/-	DRAWN: PETER HU	HD20200905-01	A	1/1
NO.	DESCRIPTION	Q'TY	UNIT	PART NO.	UNIT: MM	DATE: 2020-09-05		