

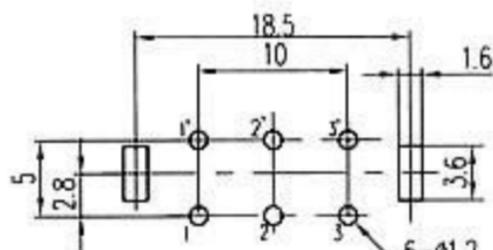
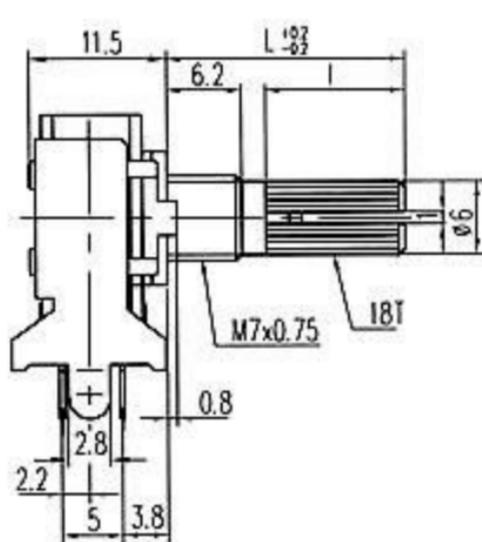


| | | | | | |
|-----------------------------------|--------------------------|-------|---------------------------------|--------|--------------------|
| 阻值允许误差 Tolerance of resistance | $\pm 20\%$ | | 绝缘电阻 Insulation resistance | DC500V | 100M Ω min |
| 额定功率 power Rating | 0.0125W | 0.06W | 耐电压 Withstanding Voltage | AC500V | 1 minute |
| 额定电压 Rated voltage | 250V | 150V | 总机械旋转角度 Total rotation angle | | 300 $\pm 5^\circ$ |
| 转动噪声 Rotational noise | $\leq 47\text{mv}$ | | 动作力 Operating force | | 20~200gf.cm |
| 双联同步误差 Tracking error | 0~-40db $\pm 3\text{db}$ | | 止挡强度 Shaft Stopper Strength | | 6Kgf/cm min |
| | | | 机械耐久性 Mechanical endurance | | 10000周min turns |

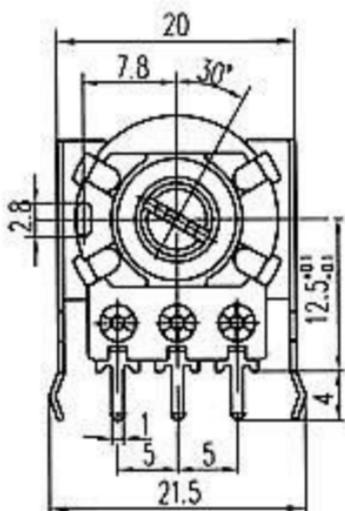

Standard Shaft Size:


●18T

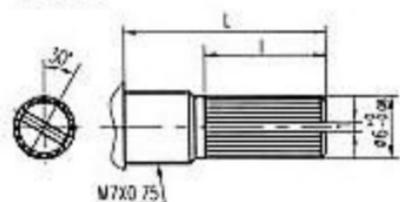

| L | 15 | 20 | 25 | 30 |
|---|----|----|----|----|
|---|----|----|----|----|

| | | | | |
|---|---|----|----|----|
| I | 7 | 12 | 12 | 12 |
|---|---|----|----|----|

●F

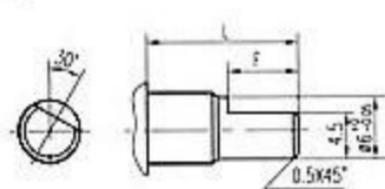

| L | 15 | 20 | 25 | 30 |
|---|----|----|----|----|
|---|----|----|----|----|

| | | | | |
|---|---|----|----|----|
| F | 7 | 12 | 12 | 12 |
|---|---|----|----|----|