


# D SERIES

## 6.0x6.0 Radial Taping Type Tact Switch



### HOW TO ORDER

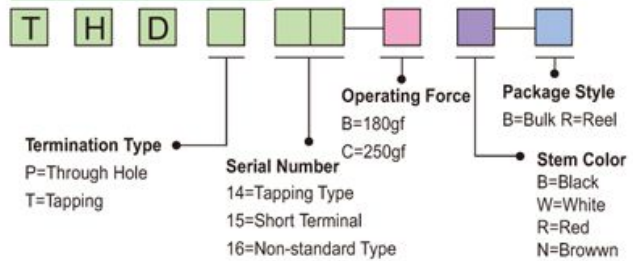

### Features

- Supplied with radial taping.
- Allows automatic insertion onto PC board with the radial auto insertion machine.

### Applications

- Operating switches in all types of electronic equipment such as audio devices, office devices, communication devices, measuring instruments, TVs, video recorders, automotive sets, etc.

### Specification

Items		Standard
Operating temperature range		-30℃ to +85℃
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MW min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mW max.
Durability	Lifetime	A:300,000 Cycles B:C:100,000 Cycles
Mechanical performance	Operating force	B:180gf C:250gf
	Travel	0.25 ± 0.1mm

### Diagram

No.	Dimensions	Circuit Diagram
		Pad Layout
1	<p>• THDT14</p>	
2	<p>• THDP15</p>	
3	<p>• THDP16</p>	