


A SERIES

2.7x3.0 Miniature Type Vertical Push Tact Switch




TACT SWITCH

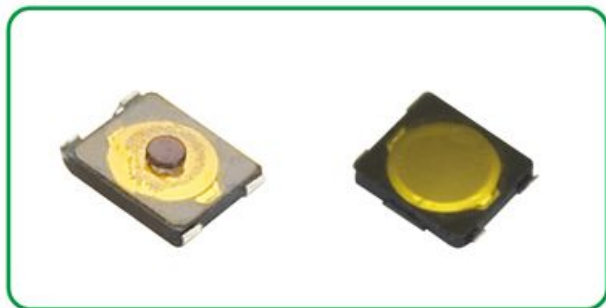

HOW TO ORDER

T V A U 1 9

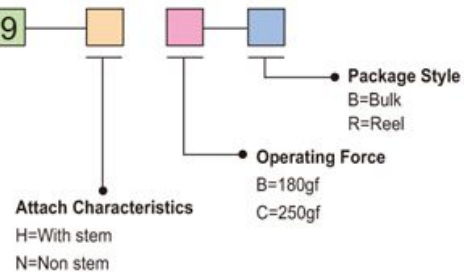

Features

- Improve mounting density of components on PC board.
- Reflow solderable
- Contacts are completely sealed, enhancing reliability
- Packaged with a 12mm wide embossed taping.

Applications

- Portable audio
- Mobile phones and personal digital assistants
- Operation of various digital devices

Specification

Items		Standard
Operating temperature range		-30°C to +85°C
Electrical performance	Rating	20mA, 15V DC
	Insulation resistance	50MW min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	500mW max.
Durability	Lifetime	B:100,000 Cycles min. C:50,000 Cycles
Mechanical performance	Operating force	B:180gf C:250gf
	Travel	0.15 ± 0.05mm

Diagram

