


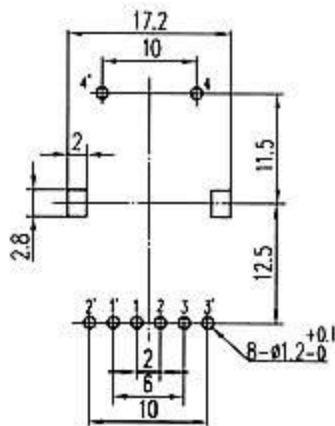
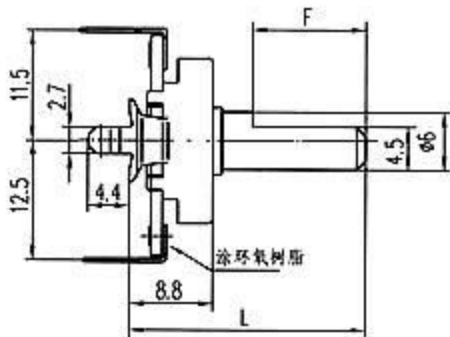


| | | | |
|-----------------------------------|--|---------------------------------|---------------------------------|
| 阻值允许误差 Tolerance of resistance | $\pm 20\%$ | 总机械旋转角度 Total rotation angle | $300 \pm 5^\circ$ |
| 额定功率 power Rating | 0.1W / 0.05W | 动作力 Operating force | 20~200gf.cm |
| 额定电压 Rated voltage | 50V AC/BC 20V | 止挡强度 Shaft Stopper Strength | 4Kgf/cm min |
| 转动噪声 Rotational noise | $\leq 47\text{mv}$ | 绝缘电阻 Insulation resistance | DC250V 100M Ω min |
| 双联同步误差 Tracking error | B 0~-20db $\pm 2\text{db}$ A C D 0~-40db $\pm 3\text{db}$ | 耐电压 Withstanding Voltage | AC300V 1 minute |
| | | 机械耐久性 Mechanical endurance | 10000 ^M min turns |

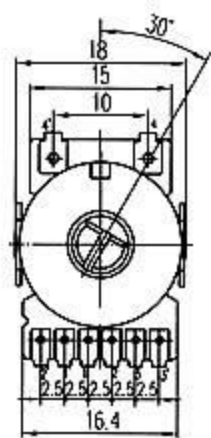


Standard Shaft Size:

●18T



●F



| 型号TYPE | | L | | | | | |
|-----------|-------------|------|----|----|----|----|----|
| | | F. I | | | | | |
| | | 15 | 20 | 25 | 30 | 35 | 40 |
| WH0171-1 | WH0171Z-1 | / | 7 | 12 | 12 | 12 | 12 |
| WH0172-1 | WH0172-2B-1 | | 7 | 12 | 12 | 12 | 12 |
| WH0171-2J | WH0172-2AJ | 7 | 12 | 12 | 12 | 12 | / |