


# H SERIES

## 4.1x4.3 Double Action Type Tact Switch

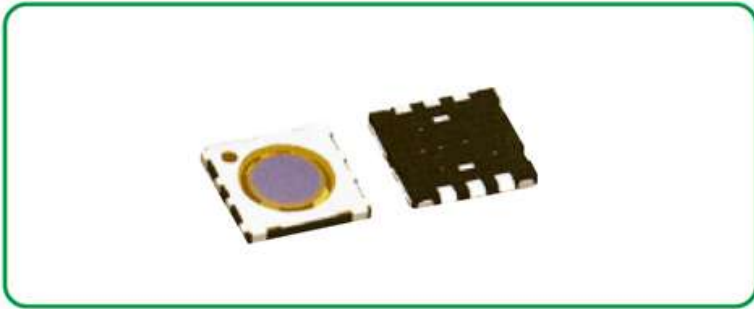

### Features

- Double action side operation
- Small, low-profile and space saving
- Long operation life

### Applications

- For operating various electronic devices such as audio devices such as audio aevices, communication devices, measuting instruments, automotive sets, etc

### Specification

Items		Standard
Operating temperature range		-30℃ to +85℃
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MW min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mW max.

Items		Standard	
Durability	Lifetime	100,000 Cycles	
Mechanical performance	Operating force	1 st 90 ± 40gf	2 st 190 ± 60gf
	Travel	1 st 0.5 ± 0.1mm	2 st 0.3 ± 0.15mm

### Diagram

No.	Dimensions	Circuit Diagram
		Pad Layout
1	<ul style="list-style-type: none"> <li>• TMHU05</li> </ul>	<p>PCB 线路 禁止进入区</p>