


TOOL LIST

P1 & P2 INNER MOLD	LM-009
P1 & P2 OUTER MOLD	LM-057



NO.	REVISION RECORD	REV.
1	FIRST ISSUE.	A

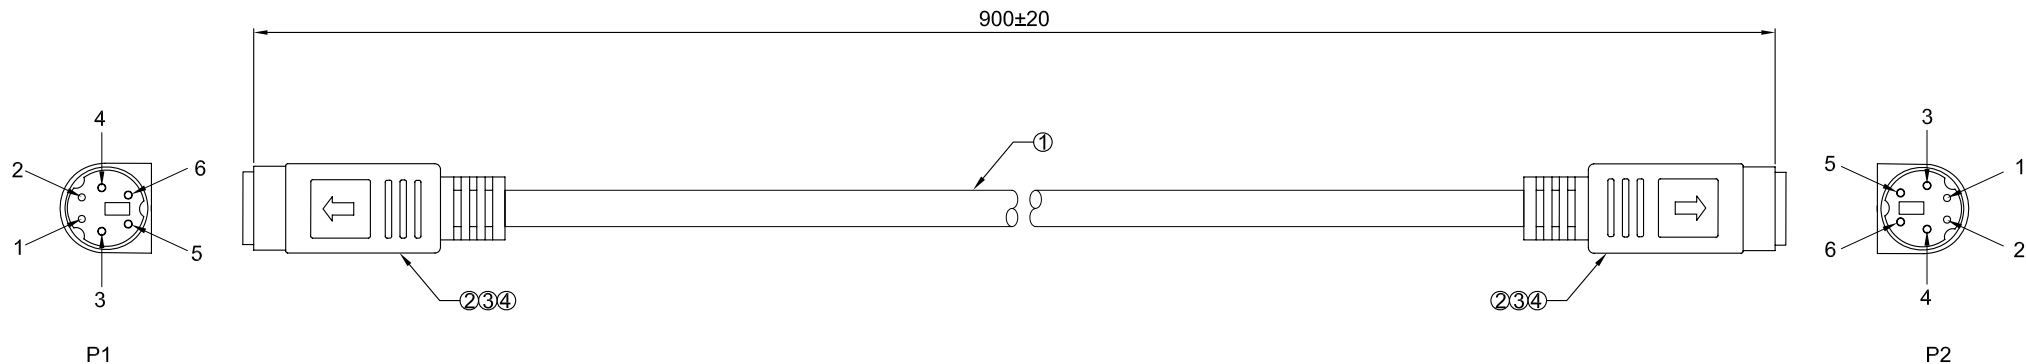

NOTES:

1. ALL MATERIALS ARE ROHS COMPLIANT.
2. TESTING: ALL PRODUCTS MUST BE 100% TESTED AT:  
COND.: 1.5 OHM MAX  
INS.: 10M OHM  
HI-V.: DC 300V 0.01 SEC.
3. PACKING: EACH CABLE IN A CLEAR ZIP-LOCK POLY-BAG.

PIN OUT

P1	P2
1	1 (BLACK)
2	2 (BROWN)
3	3 (RED)
4	4 (ORANGE)
5	5 (PURPLE)
6	6 (GREEN)
SHELL	SHELL(DRAIN)

CUSTOMER:		东莞市汉都电子有限公司 Dongguan Hundu Electronic Co., Limited							
PART NO.:									
CUSTOMER SIGNED:									
TOLERANCE:	APPROVED: JEFF GAO	ITEM : MINI DIN 6PIN F TO F, L=900MM, OD:4.3MM							
.X +/-	CONFIRMED: WANG JUN								
.XX +/-	CHECKED: YUAN TAO								
.XXX +/-	DRAWN: PETER HU	DRAWING NO.:							
NO.	DESCRIPTION	Q'TY	UNIT	PART NO.	UNIT: MM	DATE: 2020-11-28	HD20201128-01	REV.:	SHEET:
4	OVER MOLD: 50P BLACK PVC.	0.016	KG					A	1/1
3	INNER MOLD: PE LOW DENSITY.	0.008	KG						
2	CONNECTOR: MINI DIN 6PIN FEMALE, SOLDER TYPE, G/F CONTACTS, BLACK INSULATION, SHELL NICKEL PLATED.	2	PC						
1	CABLE: UL2464 CABLE, 26AWG(7/0.16TC)*6C+DRAIN+AL-FOIL , BLACK PVC JACKET, OD: 4.3±0.15MM.	900	MM						