


D SERIES

6.0x6.0 Other Bracket Shape Type Tact Switch



HOW TO ORDER

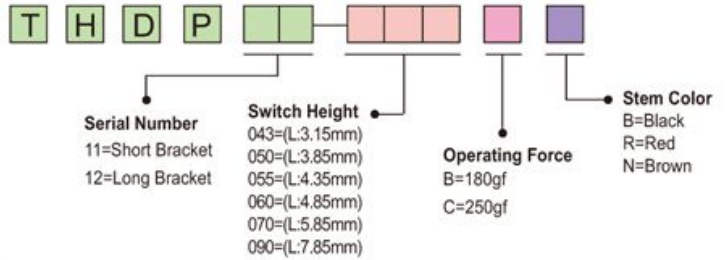

Features

- Snap-in type, which can be directly mounted on PC board.
- Some of output terminals can be also used as jumper leads, thus making circuit design easy.
- Available with anti-ESD ground terminal.
- Standard knobs are available.

Applications

- Operating switches in all types of electronic equipment such as audio devices, office devices, communication devices, measuring instruments, TVs, video recorders, automotive sets, etc.

Specification

Items		Standard
Operating temperature range		-30°C to +85°C
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MW min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mW max.
Durability	Lifetime	B:C:100,000 Cycles
Mechanical performance	Operating force	B:180gf C:250gf
	Travel	0.25 ± 0.1mm

Diagram

No.	Dimensions	Circuit Diagram Pad Layout												
1	<p>• THDP11</p> <table border="1"> <thead> <tr> <th>L</th> <th>A</th> </tr> </thead> <tbody> <tr> <td>3.15</td> <td>3.5</td> </tr> <tr> <td>3.85</td> <td>3.5</td> </tr> <tr> <td>5.85</td> <td>3.3</td> </tr> <tr> <td>8.35</td> <td>3</td> </tr> <tr> <td>15.85</td> <td>3</td> </tr> </tbody> </table>	L	A	3.15	3.5	3.85	3.5	5.85	3.3	8.35	3	15.85	3	
L	A													
3.15	3.5													
3.85	3.5													
5.85	3.3													
8.35	3													
15.85	3													
2	<p>• THDP12</p> <table border="1"> <thead> <tr> <th>L</th> <th>A</th> </tr> </thead> <tbody> <tr> <td>3.15</td> <td>3.5</td> </tr> <tr> <td>3.85</td> <td>3.5</td> </tr> <tr> <td>5.85</td> <td>3.3</td> </tr> <tr> <td>8.35</td> <td>3</td> </tr> <tr> <td>15.85</td> <td>3</td> </tr> </tbody> </table>	L	A	3.15	3.5	3.85	3.5	5.85	3.3	8.35	3	15.85	3	
L	A													
3.15	3.5													
3.85	3.5													
5.85	3.3													
8.35	3													
15.85	3													