


# A SERIES

## 2.9x3.9 Miniature Type Vertical Push Tact Switch



### HOW TO ORDER

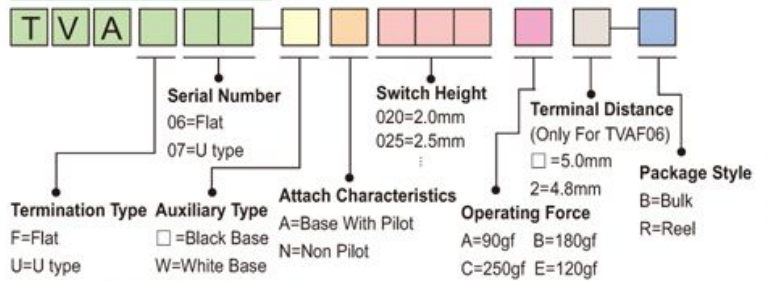

### Features

- Improve mounting density of components on PC board.
- Reflow solderable
- Contacts are completely sealed, enhancing reliability
- Packaged with a 12mm wide embossed taping.

### Applications

- Portable audio
- Mobile phones and personal digital assistants
- Operation of various digital devices

### Specification

Items		Standard
Operating temperature range		-30℃ to +85℃
Electrical performance	Rating	50mA, 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	100,000 Cycles min.
Mechanical performance	Operating force	A:90gf B:180gf C:250gf E:120gf
	Travel	0.13 ± 0.05mm

### Diagram

No.	Dimensions	Circuit Diagram Pad Layout
1	<p>• TVAF06</p>	
2	<p>• TVAU07</p>	

TACT SWITCH