


# E SERIES

## 6.2x6.2 Flat & U-Type Terminals Type Tact Switch



### HOW TO ORDER

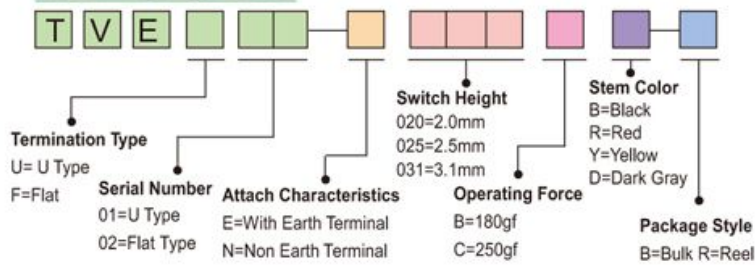

### Features

- Reflow solderable.
- Available with anti-ESD ground terminal.
- Packaged with a 16mm wide embossed taping.

### Applications

- Operating switches in all types of electronic equipment such as audio devices, office devices, communication devices, measuring instruments, TVs, video recorders, automotive sets, etc.

### Specification

Items		Standard
Operating temperature range		-30°C to +85°C
Electrical performance	Rating	50mA, 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	B:500,000 Cycles C:300,000 Cycles
Mechanical performance	Operating force	B:180gf C:250gf
	Travel	0.25 ± 0.1mm

### Diagram

No.	Dimensions	Circuit Diagram Pad Layout
1	<p>• TVEU01</p>	
2	<p>• TVEF02</p>	

TACT SWITCH