


REV	ECRN	DATE
1	NEW PRODUCTION	20201202

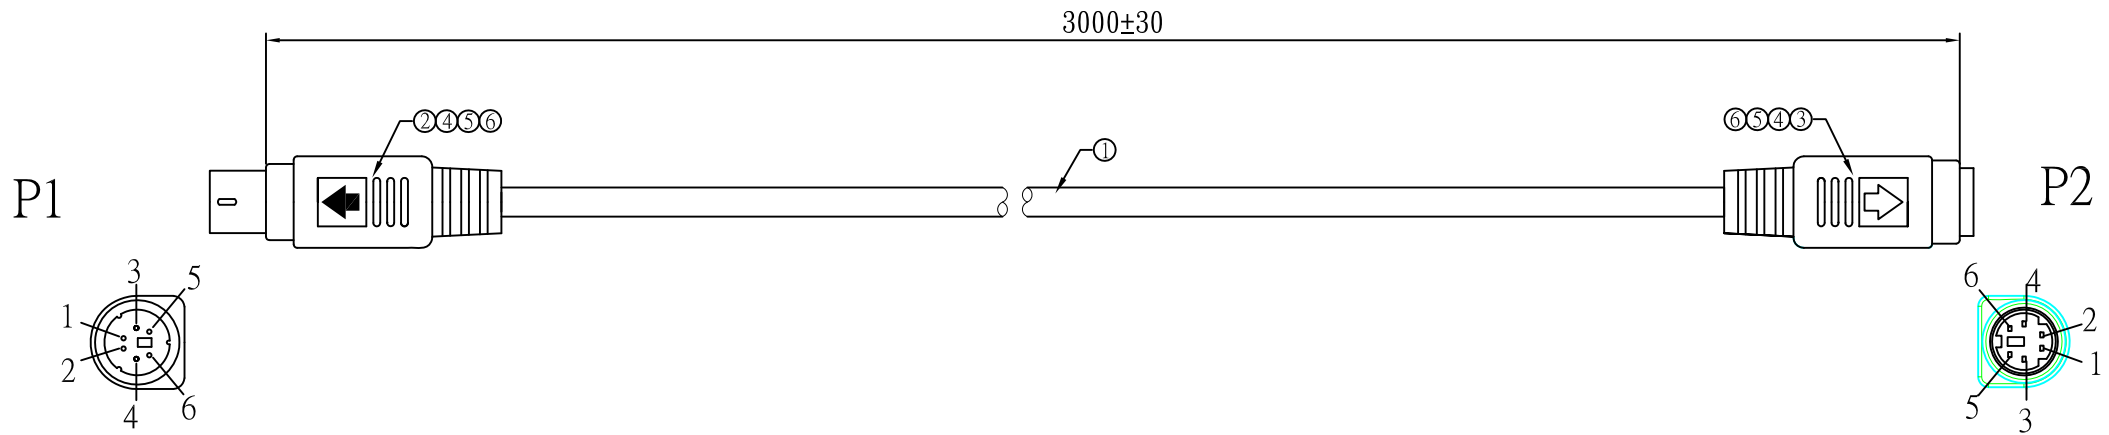

NOTES:

- 1.ELECTRICAL TEST:100%OPEN,SHORT&MIS WIRE TEST.
- 2.CONTACT RESISTANCE:2 ohm,
- 3.INSULATOR RESISTANCE:5M ohm.
- 4.HIGH VOLTAGE:DC 300V 0.01sec.
- 5.MUST BE ROHS COMPLIANT.
- 6.WORKING TEMPERATURE:-10°~+75°

PIN ASSIGNMENT

P1	COLOR	P2
1	BLACK	1
2	BROWN	2
3	RED	3
4	ORANGE	4
5	YELLOW	5
6	GREEN	6
SHELL	地线	SHELL

NO.	PART NO	ITEM	DESCRIPTION	Q' TY	UNIT
⑦	F.0101B0.0100R	TUB	TUB BLACK OD:1.0MM L=8MM	1	PCS
⑥	C.045P00.0100R	MOLDING	PVC 45P BLACK	13.6	G
⑤	C.000000.0000R	MOLDING	PE	3.5	G
④	J.000008.0500R	TIN WIRE	TIN WIRE OD:0.8MM	2.5	G
③	B.08006F.0N00R	CONNECTOR	MINI DIN 6P/F PLACTIC COLOR:BLACK SHELL:NICKEL	1	PCS
②	B.08006M.0N00R	CONNECTOR	MINI DIN 6P/M PLACTIC COLOR:BLACK SHELL:NICKEL	1	PCS
①		CABLE	UL2464 26AWG(7/0.16TC)*6C+D(7/0.16TC)+AL JACKET PVC 60P BLACK OD:4.5±0.1MM L=3000MM	1	PCS

RoHS COMPLIANT			东莞市博帆科技有限公司			
			DongGuan BoFan Electronics Co.,Ltd TEL:076938835098/38835095 FAX:076938835091			
DRAWN BY 谢建军		20201202	比例: FREE	TITLE: MINI DIN 6P M TO MINI DIN 6P F		
CHECKED BY			单位: mm	SUPPLIER`S ITEM: 9.0ACCA3009B.000R		
APPROVED BY				CUSTOMER: ReIm		
				CUSTOMER`S ITEM:		
			DRAWING NO. ACCA-3009-B	DATE	2020.12.02	