

# A SERIES


## 3.0x3.5 Miniature Type Horizontal Push & Vertical Push Tact Switch



TACT SWITCH



### HOW TO ORDER

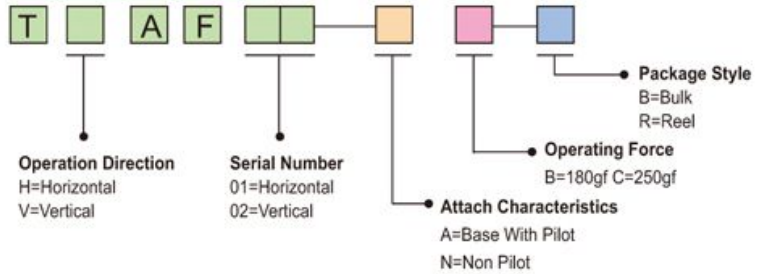

### Features

- Improve mounting density of components on PC board.
- Reflow solderable
- Sharp "click" feel with a positive tactile feedback
- Packaged with a 12mm wide embossed taping.

### Applications

- Portable audio
- Mobile phones and personal digital assistants
- Operation of various digital devices

### Specification

Items		Standard
Operating temperature range		-30 °C to +85 °C
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MW min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mW max.
Durability	Lifetime	100,000 Cycles min.
Mechanical performance	Operating force	B:180gf C:250gf
	Travel	0.13 ± 0.05mm

### Diagram

No.	Dimensions	Circuit Diagram Pad Layout
1	<p>• THAF01</p>	
2	<p>• TVAF02</p>	