


E SERIES

6.2x6.2 SMT Terminals Type Tact Switch



HOW TO ORDER

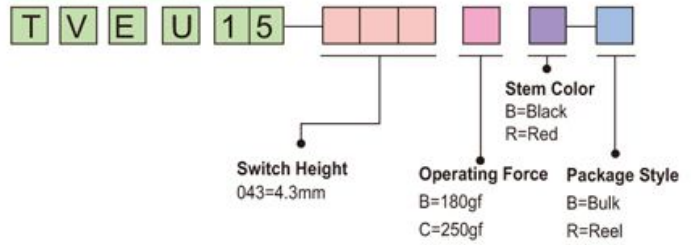

Features

- SMT type and reflow-soldering for surface mounting
- Dust protection type is available to have advantage in dusty environment

Applications

- Operating switches in all types of electronic equipment such as audio devices, office devices, communication devices, measuring instruments, TVs, video recorders, automotive sets, etc.

Specification

| Items | | Standard |
|-----------------------------|-----------------------|-----------------------------------|
| Operating temperature range | | -30 °C to +85 °C |
| Electrical performance | Rating | 50mA, 12V DC |
| | Insulation resistance | 100MW min. 100V DC |
| | Dielectric strength | 250V AC for 1 min. |
| | Contact resistance | 100mW max. |
| Durability | Lifetime | B:500,000 Cycles C:300,000 Cycles |
| Mechanical performance | Operating force | B:180gf C:250gf |
| | Travel | 0.25 ± 0.1mm |

Diagram

| No. | Dimensions | Circuit Diagram |
|-----|--|-----------------|
| | | Pad Layout |
| 1 | <ul style="list-style-type: none"> • TVEU15 <p>PC.B MOUNTING FACE</p> | |