


G SERIES

12.0x12.0 Flat Stem With Stable Operation Feeling Tact Switch



HOW TO ORDER

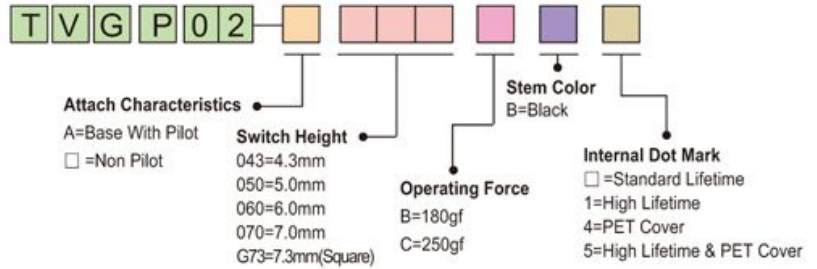

Features

- Snap-in type, which can be directly mounted on PC board.
- Some of output terminals can be also used as jumper leads, thus making circuit design easy.
- Standard knobs are available.

Applications

- Operating switches in all types of electronic equipment such as audio apparatus, office equipment, communication apparatus, measuring instruments, TV sets, VCRs, etc.

Specification

Items		Standard
Operating temperature range		-30°C to +85°C
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MW min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mW max.
Durability	Lifetime	B:200,000 Cycles C:100,000 Cycles
Mechanical performance	Operating force	B:180gf C:250gf
	Travel	0.25 ± 0.1mm

Diagram

No.	Dimensions	Circuit Diagram								
		Pad Layout								
1	<ul style="list-style-type: none"> ● TVGP02 	<table border="1"> <tr><td>H</td></tr> <tr><td>4.3</td></tr> <tr><td>5.0</td></tr> <tr><td>6.0</td></tr> <tr><td>7.0</td></tr> <tr><td>...</td></tr> </table>	H	4.3	5.0	6.0	7.0	...		
		H								
4.3										
5.0										
6.0										
7.0										
...										