


F SERIES

6.0x6.0 Long Travel Tact Switch



HOW TO ORDER

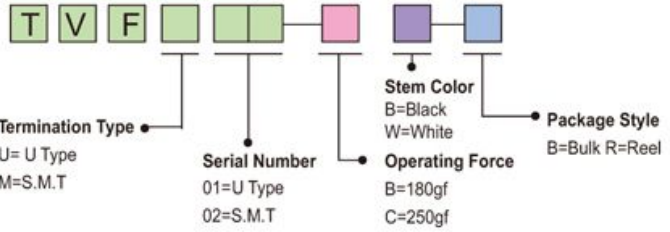

Features

- Steady and low contact resistance
- Improved operation by using a larger push plate
- Excellent solderability

Applications

- Car electronics equipment
- Input operation switches for telephones, electronic musical instruments

Specification

Items		Standard
Operating temperature range		-40°C to +85°C
Electrical performance	Rating	50mA, 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	B:C:100,000 Cycles
Mechanical performance	Operating force	B:180gf C:250gf
	Travel	1.30 ± 0.1mm

Diagram

No.	Dimensions	Circuit Diagram
		Pad Layout
1	<p>● TVFU01</p>	
2	<p>● TVFM02</p>	