



D SERIES

6.0x6.0 Radial Taping Type Tact Switch

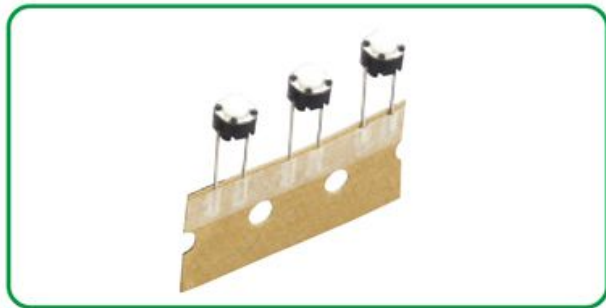

HOW TO ORDER

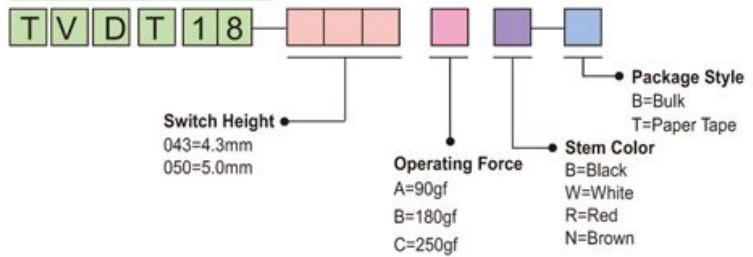

Features

- Supplied with radial taping.
- Round terminals are most suitable for radial auto-insertion mounting on the PC board.
- Improved solderability resulting from absence of terminal cutout section.

Applications

- For operating various electronic devices such as audio devices, office equipment, communication devices, TVs, video recorders, automotive sets, etc.

Specification

Items		Standard
Operating temperature range		-30°C to +85°C
Electrical performance	Rating	50mA, 12V DC
	Insulation resistance	100MW min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mW max.
Durability	Lifetime	A:300,000 Cycles B:C:100,000 Cycles
Mechanical performance	Operating force	A:90gf B:180gf C:250gf
	Travel	0.25 ± 0.1mm

Diagram

No.	Dimensions	Circuit Diagram						
		Pad Layout						
1	<p>• TVDT18</p> <table border="1"> <tr> <td>H</td> <td>A</td> </tr> <tr> <td>4.3</td> <td>3.5</td> </tr> <tr> <td>5</td> <td>3.5</td> </tr> </table>	H	A	4.3	3.5	5	3.5	
H	A							
4.3	3.5							
5	3.5							