

A SERIES


2.9x3.9 Miniature Type Horizontal Push Tact Switch



TACT SWITCH



HOW TO ORDER

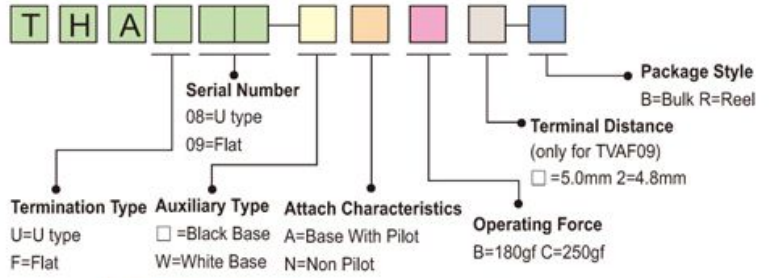

Features

- Suitable for high-density mounting.
- Reflow solderable
- Horizontal type capable of operating in horizontal to PC board
- Packaged with a 12mm wide embossed taping.

Applications

- For operating various mobile devices
- For operating various devices that require high density mounting such as mobile phones, communication devices, compact electronic devices

Specification

Items		Standard
Operating temperature range		-30℃ to +85℃
Electrical performance	Rating	50mA, 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	100,000 Cycles min.
Mechanical performance	Operating force	B:180gf C:250gf
	Travel	0.20 ± 0.1mm

Diagram

No.	Dimensions	Circuit Diagram Pad Layout
1	<p>• THAU08</p>	
2	<p>• THAF09</p>	