



I SERIES

6.0x6.0 Led Built-in Type

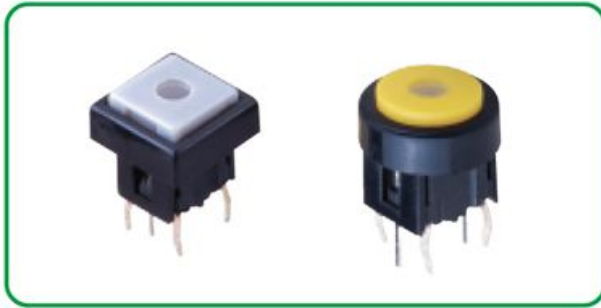

HOW TO ORDER

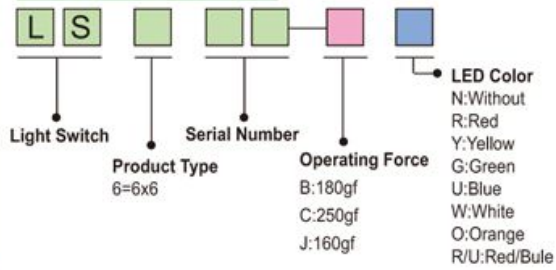

Features

- Snap-in type, which can be directly mounted on PC board.
- Some of output terminals can be also used as jumper leads, thus making circuit design easy.
- Standard knobs are available.

Applications

- Operating switches in all types of electronic equipment such as audio apparatus, office equipment, communications apparatus, measuring instruments, TV sets, VCRs, etc

Specification

| Items | | Standard |
|-----------------------------|-----------------------|-------------------------|
| Operating temperature range | | -25°C to +85°C |
| Electrical performance | Rating | 100mA, 30V DC |
| | Insulation resistance | 100MΩ min. 100V DC |
| | Dielectric strength | 250V AC for 1 min. |
| | Contact resistance | 100mΩ max. |
| Durability | Lifetime | 100,000 Cycles Min |
| Mechanical performance | Operating force | J:160gf B:180gf C:250gf |
| | Travel | 0.25 ± 0.1mm |

Diagram

| No. | Dimensions | Circuit Diagram |
|-----|----------------|-----------------|
| | | Pad Layout |
| 1 | <p>• LS609</p> | |
| 2 | <p>• LS610</p> | |