

Series WX8

Surface Mount Package for tuning fork 32.768KHz

- Frequency range:30-200KHz
- Suited for automatic mounting and reflow soldering
- For a clock source in digital equipments





ELECTRICAL SPECIFICATIONS

Item	Specifications	Remark
Frequency Range	30KHz-200KHz	Need to specify
Load Capacitance	12.5pF	Need to specify
Drive Level	1.0 μ W Max	
Frequency Tolerance	± 5 ppm- ± 100 ppm	at 25°C Need to specify
Series Resistance	50Kohm Max	at 25°C Depend on frequency
Turnover Temperature	25 \pm 5°C	
Temperature Coefficient	[-0.035 \pm 0.01]ppm/°C ²	
Operating Temperature Range	-20+70°C	
Storage Temperature Range	-40+85°C	
Motional Capacitance	0.0028pF Typical	Depend on frequency
Shunt Capacitance	1.45pF Typical	Depend on frequency
Capacitance Ratio C0/C1	500 Typical	Depend on frequency
Aging[First year]	± 5 ppm Max	25°C ± 3 °C
Quality Factor	50000 Typical	Depend on frequency
Insulation	500MOhm Min	DC100V \pm 15V(Pin to Pin,Pin to case)
	Please consult our sales representative for other specifications	

Series WX8

Surface Mount Package for tuning fork 32.768KHz

DIMENSION(mm)&SOLDER PATTERN(mm)

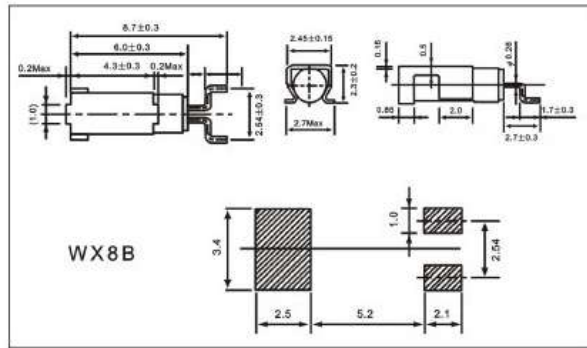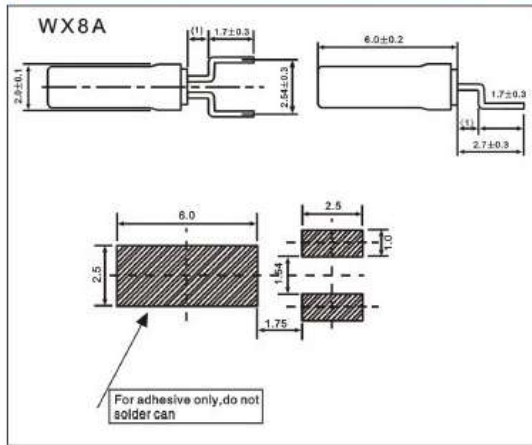

FREQUENCY VS TEMPERATURE CURVE

