


NO.	项目Item	标准Specification
1	声压sound pressure level	80dB/min. At 9.0Vp-p square wave/10cm/4.0KHz/ptaxis
2	谐振频率response frequency	4.0±0.5KHz
3	静电容量 Capacity	10500pF ±30% at 1KHz/1V
4	重量weight	3.0g
5	外壳材质housing maferial	PBT/black
6	接口terminal	出针pins
7	工作温度 Operating temperature	-20~70° C
8	贮存温度 Storage temperature	-30~80° C
9	输入电压max. input voltage	30Vp-p

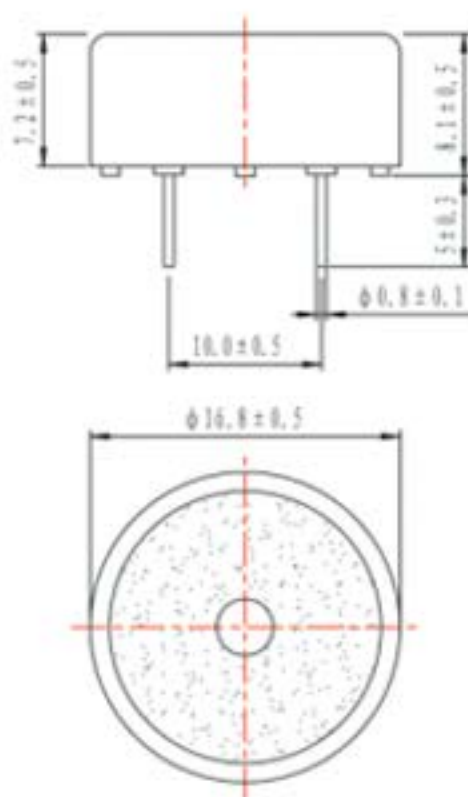

**AW1S17TEP050-400Z**