


NO.	项目Item	标准Specification
1	声压sound pressure level	85dB/min. At 3.0Vrms sine wave/10cm/3.0KHz/ptaxis
2	谐振频率response frequency	4.0±0.5KHz
3	静电容量 Capacity	25000pF±30% at 120Hz
4	重量weight	5.0g
5	外壳材质housing maferial	ABS/Black
6	输入电压max. input voltage	30Vp-p
7	工作温度 Operating temperature	-20~70° C
8	贮存温度 Storage temperature	30~70° C

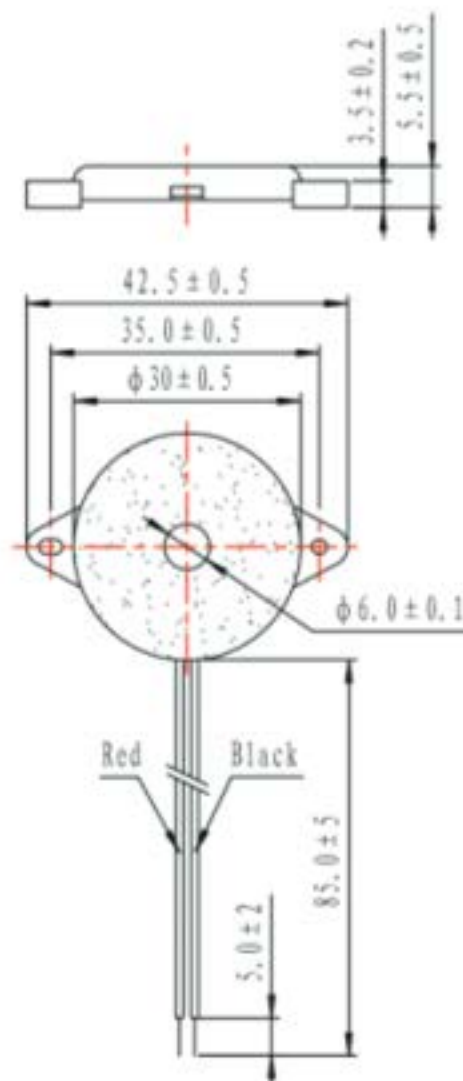

**AW1S30GEL085-402Z**