

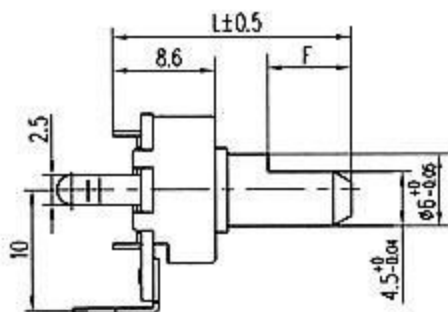



阻值允许误差 Tolerance of resistance	$\pm 20\%$	绝缘电阻 Insulation resistance	DC250V 100M Ω min
额定功率 power Rating	0.05W	耐电压 Withstanding Voltage	AC300V 1 minute
额定电压 Rated voltage	50V AC/ DC 20V	总机械旋转角度 Total rotational Angle	$300 \pm 5^\circ$
转动噪声 Rotational noise	$\leq 47\text{mv}$	动作力 Operating force	20 ~ 200gf.cm
双联同步误差 Tracking error	B 0~20db $\pm 2\text{db}$ A C D 0~40db $\pm 3\text{db}$	止挡强度 Shaft Stopper Strength	4Kgf.cm min
		机械耐久性 Mechanical endurance	10000周min turns

SHAFT SHOWN IN
FULL C.C.W POSITION

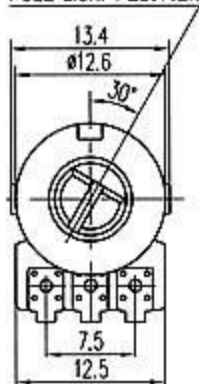

Standard Shaft Size:

●18T



型号

TYPE

L

15

20

25

30

35

WH0122-1

WH12113

WH123-1

l

5

7

12

12

12

WH0122-2
WH0122-2S

WH0122-3
WH12111

WH0122-4
WH123-2

l

5


7

12

12

12

●F



型号

TYPE

L

15

20

25

30

35

WH0122-1

WH12113

WH123-1

F

4.5

7

12

12

12

WH0122-2
WH0122-2S

WH0122-3
WH12111

WH0122-4
WH123-2

F

4.5

7

12

12

12