
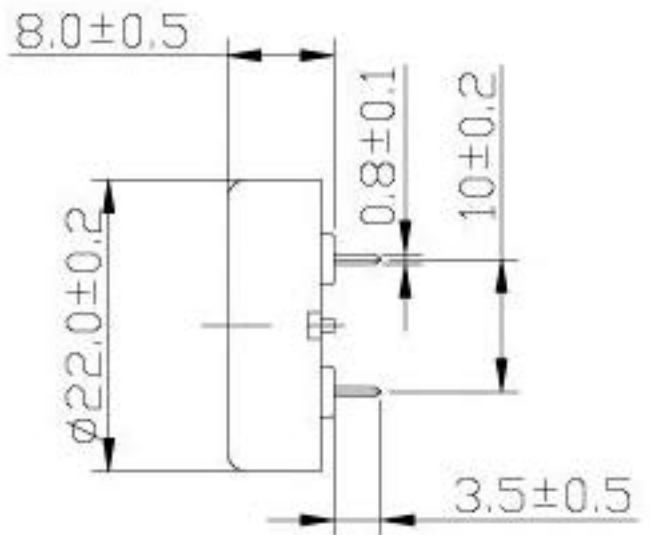


| NO. | 项目Item                 | 标准Specification                | 附注Note                         |
|-----|------------------------|--------------------------------|--------------------------------|
| 1   | SPL                    | $\geq 80\text{dB}$             | 4000Hz/3Vrms<br>Sine Wave/10cm |
| 2   | Input voltage          | $\leq 30\text{Vrms}$           |                                |
| 3   | Resonant frequency     | 4000Hz                         |                                |
| 4   | Electrostatic capacity | $15000 \pm 30\% \text{ pF}$    | at 1KHz/1V                     |
| 5   | Housing material       | PBT                            | BROWN                          |
| 6   | Lead pin material      | BRONZE                         |                                |
| 7   | Operating temperature  | $-30 \sim +70^{\circ}\text{C}$ |                                |
| 8   | Storage temperature    | $-40 \sim +80^{\circ}\text{C}$ |                                |
| 9   | Weight                 | 3.0g                           |                                |

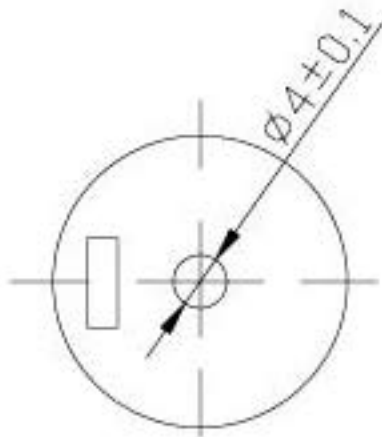

**AW1S22TEP-401Z**