
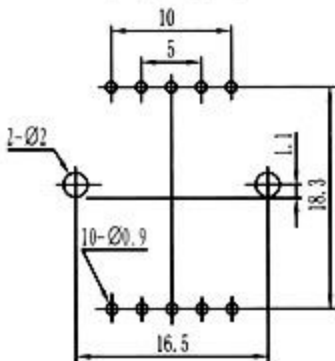
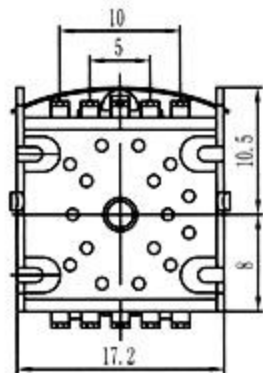
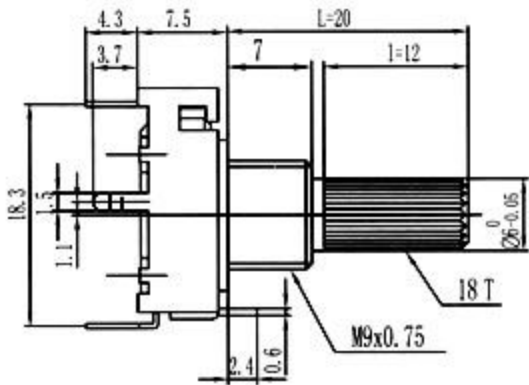


型号 Type 项目 Items	EC20	KBX20-1	KHX	SR12-2	SR17	RS25
定位数目 Click Number	15 Click	5 Click	—	2/3/4 Click	2~8 Click	2~6 Click
回转角度 Rotational angle	300°	360° Eneless	-30° ~30°	Step Angle30°	Step Angle30°	Step Angle30°
回转力距 Rotational torque	DC5V 10mA	DC5V 10mA	DC5V 0.1A	DC5V 3A	DC5V 1A	DC5V 1A
额定电压/电流 Rated voltage/rated current	50~200	50~200	150±70	150±70	150±70	150±70
回转寿命 Rotational life(cycles)	10000	10000	10000	10000	10000	10000
接触电阻 Contact Resistance	50mΩ Max	50mΩ Max	50mΩ Max	50mΩ Max	50mΩ Max	50mΩ Max
绝缘电阻 Insulation Resistance	DC100V/100MΩ Min					
耐电压 Withstand Voltage	AC100V/1Minute					



SWITCH CONTACT STATUS

型号	挡位数	机械转角	开关电路转换顺序 (递增或递减)
-2	2	30°	2 \rightleftharpoons 3
-3	3	60°	2 \rightleftharpoons 4
-4	4	90°	2 \rightleftharpoons 5
-5	5	120°	2 \rightleftharpoons 6
-6	6	150°	2 \rightleftharpoons 7
-7	7	180°	2 \rightleftharpoons 8
-8	8	210°	2 \rightleftharpoons 9