


NO.	项目Item	标准Specification
1	声压sound pressure level	75dB/min. At 12Vp-p square wave/10cm/1.9KHz/IES1350
2	谐振频率response frequency	1.9±0.5KHz
3	静电容量 Capacity	88000pF ±30% at 120Hz
4	重量weight	2.4g
5	外壳材质housing maferial	ABS/black
6	接口terminal	lead wire
7	工作温度 Operating temperature	-20~70° C
8	贮存温度 Storage temperature	-30~80° C
9	输入电压max.input voltage	30Vp-p

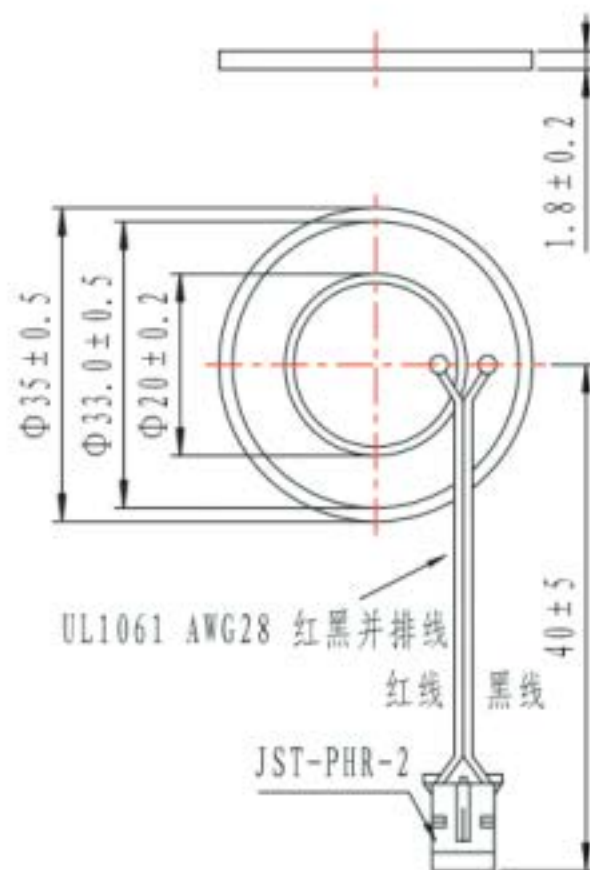

AW1S35TEL040-191Z