


NO.	项目Item	标准Specification
1	声压 sound pressure level	80dB/min. at 12Vp-p square wave
2	输入电压Max. input voltage	40Vp-p Max.
3	静电电容static capacitance	90000pF \pm 30% at 1KHz/1V
4	重量weight	3.0g
6	接口terminal	导线lead wire UL1571 AWG28/2pins
7	工作温度 Operating temperature	25~70°C
8	贮存温度 Storage temperature	-30~70°C
9	外壳材料case material	ABS/Black
10	谐振频率resonant capacitance	1.0 \pm 0.3KHz

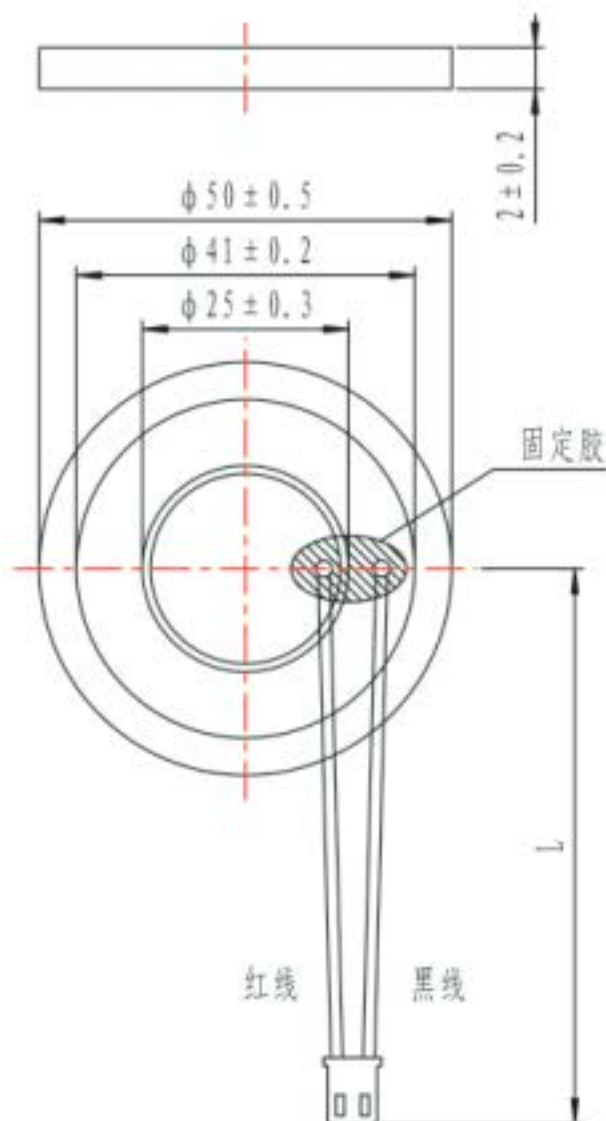

AW1S50TEL-081Z