


1	SPL	$\geq 85\text{dB}/1000\text{Hz}/9\text{V p-p, Square Wave}/10\text{cm}$
2	Input voltage	$\leq 40\text{V p-p}$
3	Resonant frequency	1000Hz
4	Electrostatic capacity	$80000 \pm 30\% \text{ pF/at } 1\text{KHz}/1\text{V}$
5	Housing material	PC/BLACK
6	Lead wires	UL1095 AWG 28# /RED&BLACK
7	Operating temperature	$-20 \sim +70^{\circ}\text{C}$
8	Storage temperature	$-30 \sim +80^{\circ}\text{C}$

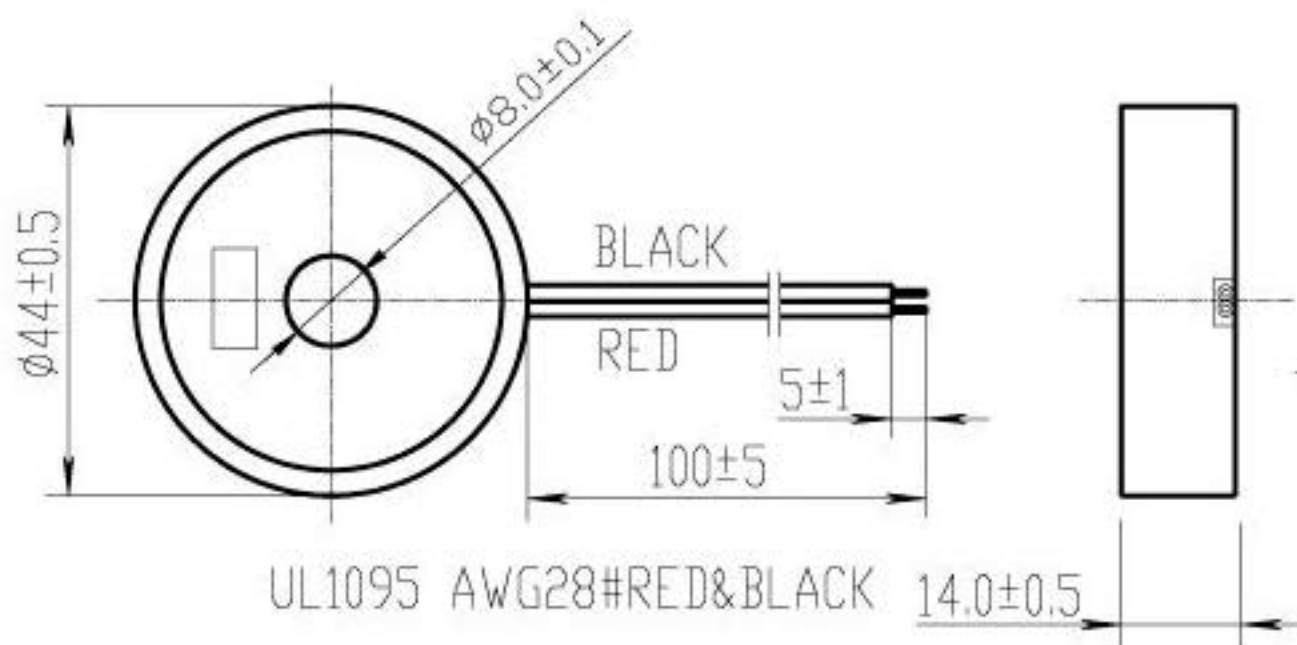

AW1S44GEL-103