
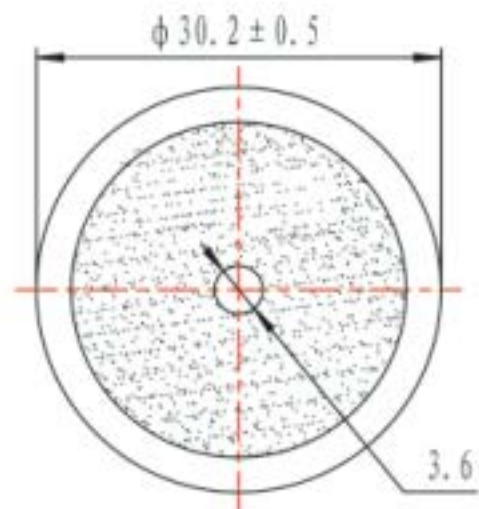


NO.	项目Item	标准Specification
1	声压sound pressure level	85dB/min. At 3.0Vrms sine wave/10cm/3.0KHz/ptaxis
2	谐振频率response frequency	3.05KHz
3	静电容量 Capacity	35000pF ±30% at 1KHz/1V
4	重量weight	5.0g
5	外壳材质housing maferial	ABS
6	输入电压max. input voltage	30Vp-p
7	工作温度 Operating temperature	-30~70° C
8	贮存温度 Storage temperature	430~70° C

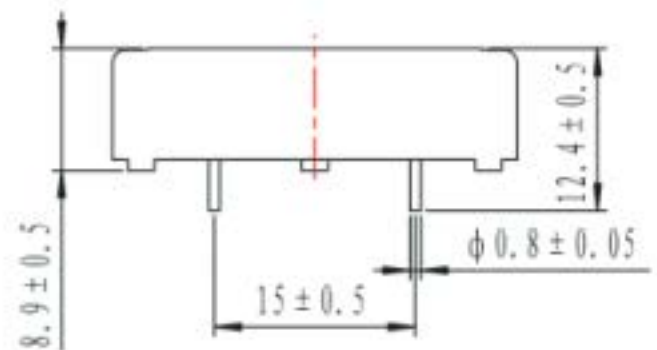

AW1S30TEP-302AZ