


E SERIES

6.2x6.2 SMT Terminals Type Tact Switch



HOW TO ORDER

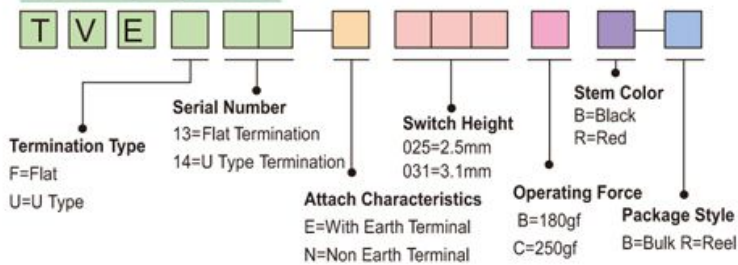

Features

- SMT type and reflow-soldering for surface mounting
- Wide product variety
- Available with ground terminal
- Dust protection type is available to have advantage in dusty environment

Applications

- Operating switches in all types of electronic equipment such as audio devices, office devices, communication devices, measuring instruments, TVs, video recorders, automotive sets, etc.

Specification

Items		Standard
Operating temperature range		-30°C to +85°C
Electrical performance	Rating	50mA, 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	B:500,000 Cycles C:300,000 Cycles
Mechanical performance	Operating force	B:180gf C:250gf
	Travel	0.25 ± 0.1mm

Diagram

No.	Dimensions	Circuit Diagram Pad Layout
1	<p>• TVEF13</p>	
2	<p>• TVEU14</p>	