
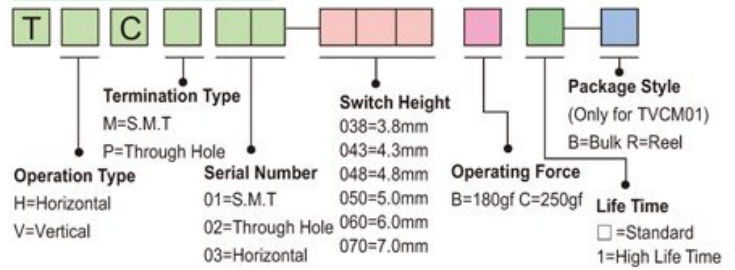


C SERIES

4.5x4.5 Through Hole & SMT Type Tact Switch

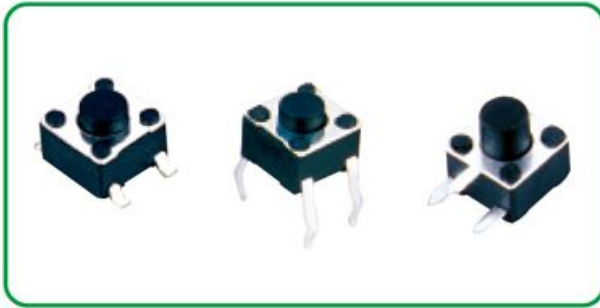

Features

- Snap-in type, which can be directly mounted on PC board.
- Some of output terminals can be also used as jumper leads, thus making circuit design easy.
- Standard knobs are available.

Applications

- Operating switches in all types of electronic equipment such as audio apparatus, office equipment, communication apparatus, measuring instruments, TV sets, VCRs, etc

Specification

Items		Standard
Operating temperature range		-30°C to +85°C
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MW min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mW max.
Durability	Lifetime	B:100,000 Cycles C:50,000 Cycles
Mechanical performance	Operating force	B:180gf C:250gf
	Travel	0.25 ± 0.1mm

Diagram

No.	Dimensions	Circuit Diagram Pad Layout	
		Circuit Diagram	Pad Layout
1	<p>● TVCM01</p>		
2	<p>● TVCP02</p>		
3	<p>● THCP03</p>		